
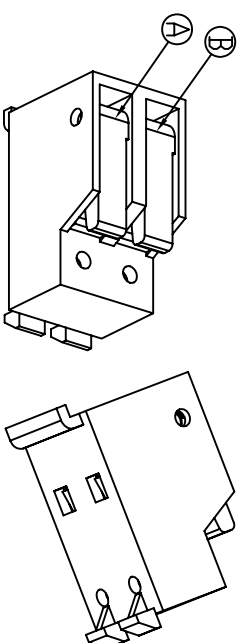




REV	DESCRIPTION	DATE
01		
02		

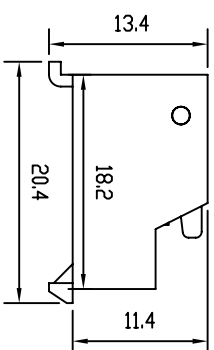

电气性能	
额定电压:	300V
额定电流:	12A
导线线径:	φ0.8mm~φ1.0mm
机械性能	AC2000V/1MIn
扭力矩:	0.4Nm (3.5Lb-In.)
环境温度:	-40° C~+105° C
剥线长度:	5-6mm
尺寸	
间距:	5.0mm
极数:	2P 3P
材质和后处理	
塑件:	PA66, UL94V-0
弹片:	不锈钢/清洁
穿针:	不锈钢/清洁

DD NOT SCALE DRAWING	NAME	DATE
DRAWN	张明福	10-08-31
CHECKED		
ENG APPR.		

DD NOT SCALE DRAWING	MATERIAL:
LINEAR	见产品性能表
HOLE'S DIA.	
AN GULAR	

### REVISIONS

NO.	REV.	DESCRIPTION	DATE	APPROVED

DD NOT SCALE DRAWING	FINISH:
LINEAR	见产品性能表
HOLE'S DIA.	
AN GULAR	

## 杠杆式 2P

TITLE:	P/N:	REV
SCALE: 2:1	A4	3
SHEET 1 OF 1		